

...no Tools for Fools!



Operating instructions for AppFix Counter used with AppFix Roll n' Cut and TreeMaxx EasyReachPro

This counter is a precision measuring device, it must therefore always be operated with the necessary care.


Before starting a measurement, all numbers in the viewing window must be set to "0". To do this, the lever on the side is pushed completely backwards as far as it will go. It is recommended to repeat this procedure to always ensure a safe reset to "0".

When starting the measurement, make sure that the far-right indicator roller starts counting immediately. If this is not the case, please stop the measurement and operate the reset lever again. If measurements are continued anyway, the counter may wear out more quickly.

Coarse contamination, especially on the drive shaft, can lead to incorrect measurements or to blocking of the measuring wheels. Do not immerse the meter in water or other liquids.

Technical data:

- **Display:** 5 digits 999.99; first digit = 0.01 meter
- **Digits:** approx. 4.5 mm tall, white on black, red decimal display
- **Drive shaft:** protruding on both sides, 5 mm diameter
- **Load:** max. 200.00 m/min (60 m/min) with measuring wheel
- **Base plate dimensions (L x W x H):** 59,5 x 67 x 32 mm
- **Housing material:** grey plastic
- **Application temperature range:** 0 - 60 °C / 32 – 140 °F
- **Weight:** approx. 130 g

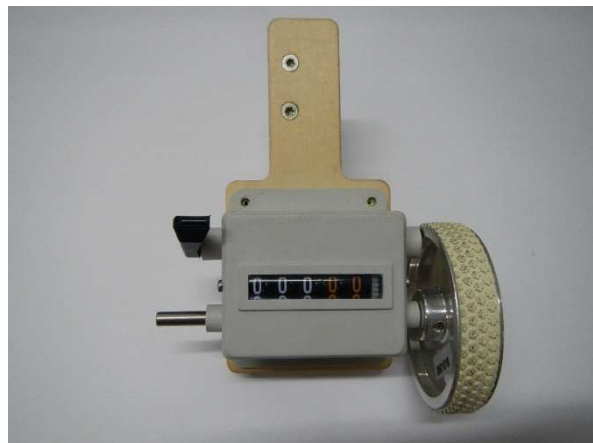

Tel.: +49 (0) 22 92 - 3974 030
Fax.: +49 (0) 22 92 - 3974 049
E-Mail: sales@yellotools.com
www.yellotools.com

VR-Bank Rhein-Sieg eG
Name: Yellotools GmbH
IBAN: DE 82 3706 9520 6506 1240 16
BIC: GENODED1RS

UST-ID (VAT): DE 334344039
HRB 16004 Amtsgericht Siegburg
Geschäftsführer (CEO):
Michael Althoff